

# FLORIS



**carisa**  
designer radiators


# FLORIS

|                 |   |                  |                     |
|-----------------|---|------------------|---------------------|
| <b>Material</b> | <b>Stock Finishes</b>                                     | <b>Guarantee</b> | <b>Installation</b> |
| Mild Steel      | <a href="#">PLS SEE COLOUR KEY CHART - Click for Link</a> | 5 Years          | Vertical            |

| PRODUCT CODE   | Height (mm) | Width (mm) | Sections | Pipe Centers (mm) | Wall to pipe Centers | Wall Distance | Nett Weight | Water Content | Fuel Type | Heat Outputs |      |
|----------------|-------------|------------|----------|-------------------|----------------------|---------------|-------------|---------------|-----------|--------------|------|
|                | H           | W          | n        | C1                | A (mm)               | D (mm)        | (kg)        | (lt)          |           | Watts        | BTU  |
| FLR 0500080006 | 800         | 500        | 6        | 100               | 68-83                | 93-108        | 5.3         | -             | C         | 444          | 1517 |
| FLR 0500100008 | 1000        | 500        | 8        | 100               | 68-83                | 93-108        | 6.9         | -             | C         | 587          | 2005 |
| FLR 0500120010 | 1200        | 500        | 10       | 100               | 68-83                | 93-108        | 8.5         | -             | C         | 741          | 2530 |

Please add finishing code at the end of the product code **Code example : FLR 0500100008 CHR**

Fuel type i.e  
C: Central Heating  
E: Electrical Heating  
D: Dual Heating (C+E)

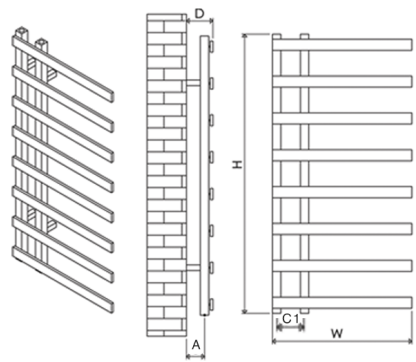

Please ask for details.  
n = number of sections  
Max. working pressure 10 bar  
Max. working temperature 95 °C  
Connections 1/2"